


UM7206™

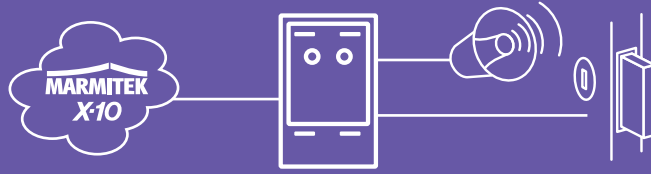

EN UM7206 Universal receiver

- Universal switch module.
- Transforms a Marmitek X-10 signal into a switch contact
- Control your own low-voltage applications
- Controllable from a distance with the Marmitek X-10 commands On/Off.
- Built-in buzzer can be switched off.
- Can be installed for pulse or continuous contact.
- Switches 24V DC with power up to 5A.
- Controllable by hand with pushbuttons on the module itself.

DE UM7206 Universalempfänger

- Universelles Schaltmodul.
- Wandelt ein Marmitek X-10 Signal in einen Schaltkontakt um
- Steuern Sie Ihre eigenen Schwachstromanwendungen
- Mit den Marmitek X-10 Befehlen 'An' und 'aus' fernbedienbar.
- Eingebauter, ausschaltbarer Signalgeber.
- Kann auf Puls- oder Dauerkontakt eingestellt werden.
- Schaltet 24V DC mit Strom bis 5 A.
- Per Hand bedienbar mit zwei Tasten: 'An/Test' und 'Aus'.

FR UM7206 Récepteur universel

- Module de commutation universel.
- Convertit un signal Marmitek X10 en un contact de commutation
- Activez vos propres applications de basse tension
- Peut être activé à distance avec commandes Marmitek X10 en marche et arrêt.
- Sonnerie incorporée déconnectable.
- Peut être réglé pour contact à impulsion et continu.
- Connecte 24V DC avec des courants jusqu'à 5 A.
- Peut être commandé manuellement avec boutons-poussoir sur le module.

ES Receptor universal UM7206

- Módulo de conmutación universal.
- Convierte una Marmitek señal X-10 en un contacto de conmutación
- Manejar aplicaciones de baja tensión
- Manejable a distancia con Marmitek comandos X-10 para encender y apagar.
- Buzzer apagable incorporado.
- Puede ajustarse a contacto de impulsos y a contacto permanente.
- Conmuta 24 V DC con corrientes eléctricas hasta 5 A.
- Manejable manualmente utilizando los botones en el módulo.

IT Ricevitore universale UM7206

- Modulo universale di commutazione.
- Trasforma un segnale X-10 di Marmitek in un contatto di relè
- Comando delle vostre applicazioni a bassa tensione
- Comandabile a distanza grazie ai comandi X-10 di Marmitek ON e OFF.
- Cicalino interno escludibile.
- Può essere impostato per contatto impulso e continuo.
- Commuta 24V DC con correnti fino a 5 A.
- Controllabile manualmente mediante pulsanti sul modulo.

NL UM7206 Universele ontvanger

- Universele schakelmodule.
- Zet een Marmitek X-10 signaal om in een schakelcontact
- Bestuur uw eigen laagspanningsapplicaties
- Op afstand bestuurbaar met Marmitek X-10 commando's Aan en Uit.
- Uitschakelbare ingebouwde buzzer.
- Kan ingesteld worden voor puls- en continue contact.
- Schakelt 24V DC met stromen tot 5 A.
- Met de hand te bedienen d.m.v. druktoetsen op de module.

UM7206™

The UM7206 contains an isolated contact relay and a piezo sounder (beeper). It can be set to operate as a beeper only, as an isolated contact relay only, or both. It can be set for momentary or continuous operation for the sounder and/or isolated contact relay. The isolated contact relay is rated for 5 A at 24 VDC. When set to continuous operation the relay contacts and/or the module beeps continuously when an ON command is received. When an OFF command is received the relay contacts open and/or the beeper stops. When set for momentary operation the relay contacts close and/or the beeper gives three or four beeps when an ON command is received. The relay contacts then open automatically after about 0,5 second and/or the beeper stops automatically after three or four beeps. In this mode, OFF commands are ignored. The module has a test (ON) button and a unit OFF button.

Technical data

Supply voltage	230V ±10% 50 Hz
Power consumption	≤ 1 W
Making capacity	5 A at 24 VDC
Signal sensitivity	15 mVpp min 50 mVpp max at 120 kHz
Input impedance	≥ 55 Ohms (L - N) at 120 kHz
X-10 Key codes receiving	On, Off.
Connectors	2 x screw connector
Ambient temperature	- 10° C to + 50° C (operation) - 20° C to + 70° C (storage)
Dimensions	55 x 90 x 38 mm (width x height x depth)

Also available

Visit www.marmitek.com for our complete product range.



Plug-in Modules



Transmitters/Controllers



Dimmers/Switchers



Build-in Modules



Din-rail Modules



Micro Modules

Set includes



1x UM7206



1x User Manual
English, Deutsch
Français, Español,
Italiano, Nederlands

Order information

UM7206™	Europlug UK Plug	Art. nr. 08944 Art. nr. 09573
Universal box size (LxWxH)	90 x 74 x 144 mm with euroslot	

