

# IPEyeHousing10

## Outdoor IP Camera housing With heater and fan



## Quick Installation Guide



IPEyeHousing10 ..... 1

**Outdoor IP Camera housing** ..... 1

**With heater and fan** ..... 1

**Quick Installation Guide** ..... 1

  SAFETY WARNINGS ..... 4

  Box Contents: ..... 5

  Introduction ..... 5

  Extra tools needed: ..... 5

  Installation ..... 5

    Wireless setup: ..... 6

    Wired setup: ..... 7

  Mounting the IPEyeHousing10 ..... 8

  TECHNICAL SPECIFICATIONS: ..... 9



## **SAFETY WARNINGS**

- All the safety and operating instructions should be read before the units is operated.
- The wiring of your electrical installation is live (230 V) and extremely dangerous. Never connect the module when plugged into the mains. Always turn off the main switch before starting the installation. Precautions for anti-lightning and anti-surfing should be taken if necessary.
- During the course of transportation, storage and installation, the product should be avoided from incorrect operations such as heavy pressing, strong vibration etc., which can cause damage of the product as there are sophisticated optical and electronic devices inside the machine.
- This product is for professional use and should be installed by a certified installer.
- Do not operate it in case temperature, humidity and power supply are beyond the limited stipulations.
- Do not place this unit on an unstable stand, tripod, bracket, or mount. The unit may fall, causing serious injury to a person and serious damage to the unit. Use only with a stand, tripod, bracket, or mount recommended by Marmitek or sold with the product. Any mounting of the unit should follow the manufacturer's instructions and should use mounting accessory recommended by manufacturer.
- If necessary, use a commercial lens cleaning paper to clear the lens windows. Gently wipe the lens window until clean.
- In case of improper usage or if you have altered and repaired the product yourself, all guarantees expire. Marmitek does not accept responsibility in the case of improper usage of the product or when the product is used for purposes other than specified. Marmitek does not accept responsibility for additional damage other than covered by the legal product responsibility.
- This product is not a toy. Keep out of reach of children.



## **Box Contents:**

Outdoor Housing  
Mounting Bracket  
Bag with 4 mounting plugs, 2 screws and Allen key  
External Antenna for IPEyeAnywhere 11 and 21  
Smaller Ethernet cable in order to paste through the housing  
Poweradapter extension cable for IPEyeAnywhere camera to paste through the housing  
Poweradapter  
Quick Installation Guide

## **Introduction**


The housing of the IPEyeHousing10 is rain and dustproof to protect your IP EyeAnyWhere IP Camera from adverse environment conditions. Constructed from metal, the housing is compact and heavy duty. The heater has two elements so that it can operate as a heater and defroster.

## **Extra tools needed:**

Spanner, 10 mm  
cross-slotted screwdriver  
drilling machine  
drill, 8 mm

## **Installation**

Unpack the carton and carefully take out the attachments.

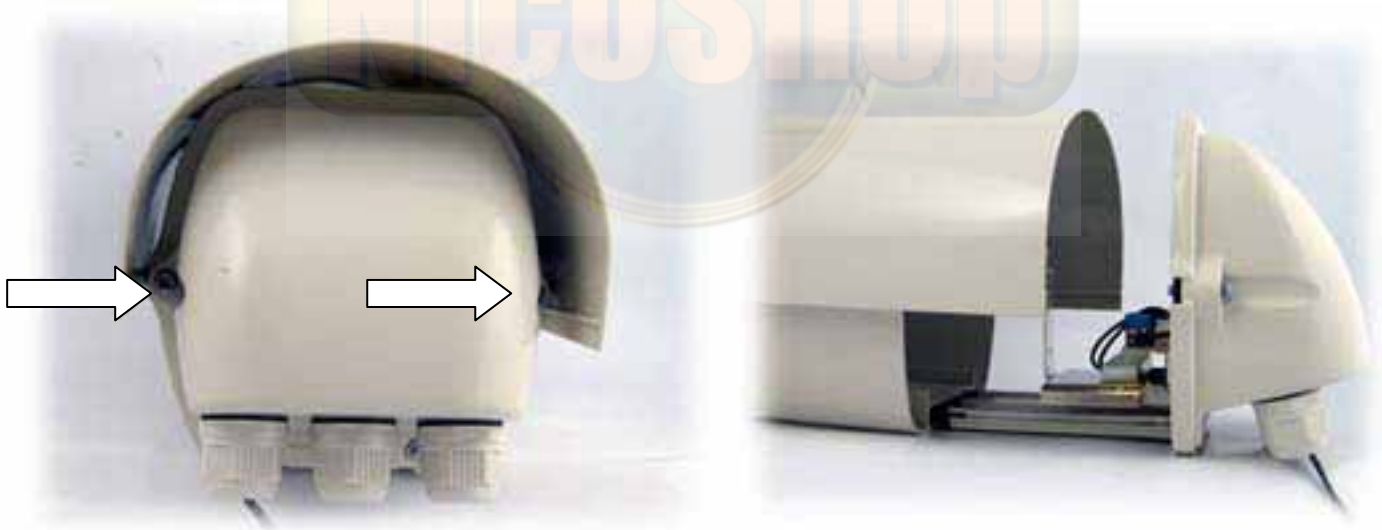

Remove the 2 screws from the back of the housing and keep them in a save place.Slide out the back end of the housing.



## Wireless setup:



When you have a IPEyeAnywhere 11 or 21 and want to use it wireless, pass through the cable of the external antenna.



Pass through the poweradapter extension cable.  
Remove the original antenna and connect the antenna cable .Connect the poweradapterplug.  
Connect the camera to the bracket with the supplied screw and a 10 mm spanner.

## Wired setup:



When you want to use a wired connection, pass through the flat Ethernet cable and the poweradapter extension cable.



Connect the camera to the bracket with the supplied screw and a 10 mm spanner.

## **Mounting the IPEyeHousing10**



Slide in the back end of the housing and place the 2 screws into the back of the IPEyeHousing.



Place the mounting bracket against the wall and mark the 4 holes.  
Drill the 8mm holes, insert the screws and fix the mounting bracket on the wall.  
Mount the mounting bracket to the housing with the provided screws. Use the provided Allen key to secure the mounting bracket at the desired position.

## **TECHNICAL SPECIFICATIONS:**

Input Voltage:	12V DC (included); 15W Dual-element heater is thermostatically controlled.
Fan:	activates at 35°C deactivates at 25°C
Heater:	activates at 15°C deactivates at 25°C
Construction:	Aluminum
Finish:	Beige coated
Housing size:	147 x 140 x 270 mm
IP value:	IP66
Ambient temperature:	-5°C ~ 45°C
Weight Housing :	1.88 Kg
Mounting Bracket:	yes
Dimension:	205 mm
Swivel Angle:	360 degrees
Weight:	420 g



Environmental Information for Customers in the European Union  
**European Directive 2002/96/EC requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.**

# DECLARATION OF CONFORMITY

Hereby, Marmitek BV, declares that this IPEyeHousing10 is in compliance with the essential requirements and other relevant provisions of the following Directives:

**DIRECTIVE 2004/108/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 15 December 2004 on the approximation of the laws of the Member States relating to electromagnetic compatibility**

**Directive 2006/95/EC of the European Parliament and of the Council of 12 December 2006 on the harmonisation of the laws of Member States relating to electrical equipment designed for use within certain voltage limits**

**Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment**

**MARMITEK BV - P.O. BOX 4257 - 5604 EG EINDHOVEN – THE NETHERLANDS**



## Copyrights

Marmitek is a trademark of Marmidenko B.V.

IPEyeHousing10 is a trademark of Marmitek B.V. **All rights reserved.**

Copyright and all other proprietary rights in the content (including but not limited to model numbers, software, audio, video, text and photographs) rests with Marmitek B.V. Any use of the Content, but without limitation, distribution, reproduction, modification, display or transmission without the prior written consent of Marmitek is strictly prohibited. All copyright and other proprietary notices shall be retained on all reproductions.





  
**MARMITEK<sup>®</sup>**  
[www.marmitek.com](http://www.marmitek.com)